



# 75Ω Miniature BNC Connector

4 Piece BNC Crimp Male

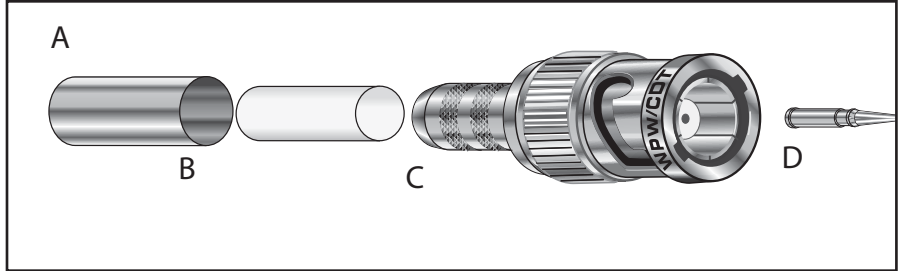

| PART NO.   | CABLE TYPE | A<br>CRIMP FERRULE<br>HEX SIZE | B<br>FERRULE I.D. | C<br>CONNECTOR<br>Body I.D. | D<br>CONTACT I.D. | JACKET O.D.       | WPW CABLES  |
|------------|------------|--------------------------------|-------------------|-----------------------------|-------------------|-------------------|---|
| CN-BM74-19 | MINIATURE  | .178"                          | .180"             | .120"                       | .020"             | .108"<br>(3.17mm) | WP258263<br>WP258265<br>255CRGB<br>5CRGB<br>3CRGB |

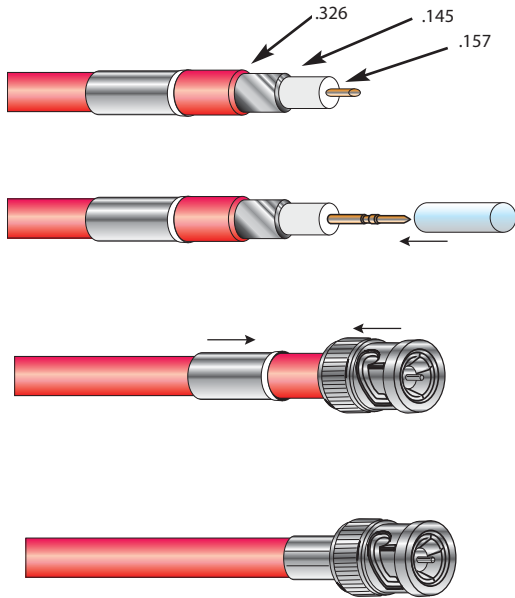

### Assembly Instructions:

1. Trim Cables as shown, taking care not to nick the inner Conductor or braid.
2. Slip crimp sleeve over cable. Place inner conductor into contact, take care that inner dielectric is square and touching center contact. Crimp with the appropriate .068" Crimp tool.
3. Flair outer braid, slip the dielectric sleeve over the dielectric. Push the contact or center pin into the connector body until a gentle snap is felt, indicating the contact is in place. Slide the crimp sleeve in place being sure it butts against rear of connector body. Crimp with the appropriate tool. Crimp only **once** to the back of the crimp sleeve using the appropriate .178" Crimp.

| PART NO.   | CABLE                | CRIMP<br>BRAID HEX | Center Pin<br>Crimp | CRIMP TOOL | STRIP TOOL |
|------------|----------------------|--------------------|---------------------|------------|------------|
| CN-BM74-19 | MINIATURE<br>COAXIAL | .178               | .060"               | TL-105     | TL-825     |

**WEST PENN WIRE**

2833 West Chestnut Street  
Washington, PA 15301

724-222-7060  
FAX: 724-222-6420