

Flat Parallel Cable

Rev.2. 5/02

Description:


- Multiple Conductor cable
- 6 Conductor 24AWG unshielded
- Flat Parallel Cable
- PVC

Applications:

- Power-limited Control Circuits

Rating:

- UL listed NEC type CL2
- Constructed in accordance with UL Standard 13
- Complies with the UL 1581 Vertical Flame Test
- Temp. Range: -20°C to 60° dry location

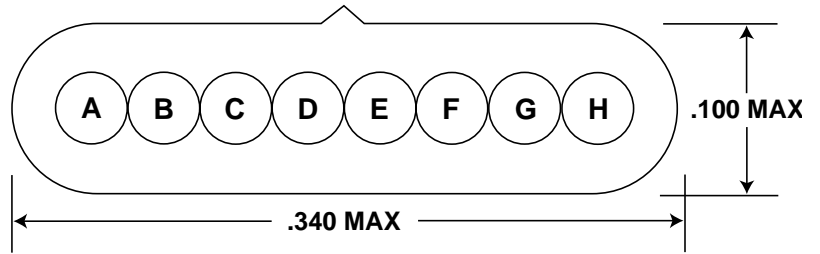

Color Code:

Mechanical Characteristics	
Number of Conductors	6
Awg. Size	24
Conductor Type	Solid Bare Copper
Nom. Insulation Thickness	.0065in (.17mm)
Nom. Jacket Thickness	.024 in (.61mm)
Nom. O.D.	.090 in.x .250 (2.29 mm x 6.35mm)
Jacket Type Color	Gray

Conductor No.	Conductor
A	Yellow
B	Blue
C	Black
D	Orange
E	Red
F	Green
G	White
H	Violet

