

Flat Parallel Cable

Rev.2. 5/02

Description:


- Multiple Conductor cable
- 8 Conductor 24AWG unshielded
- Flat Parallel Cable
- PVC

Applications:

- Power-limited Control Circuits

Rating:

- UL listed NEC type CL2
- Constructed in accordance with UL Standard 13
- Complies with the UL 1581 Vertical Flame Test
- Temp. Range: -20°C to 60° dry location

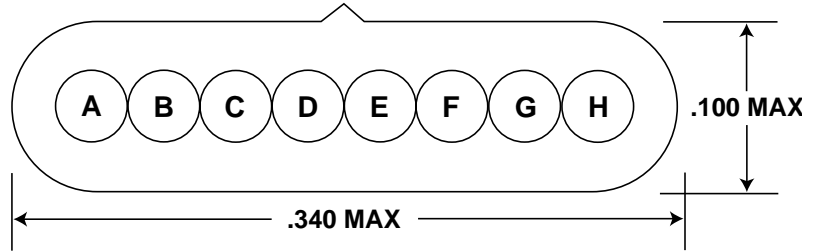

Color Code:

| Mechanical Characteristics | |
|----------------------------|---|
| Number of Conductors | 8 |
| Awg. Size | 24 |
| Conductor Type | Solid Bare Copper |
| Nom. Insulation Thickness | .0065in (.17mm) |
| Nom. Jacket Thickness | .030 in (.76mm) |
| Nom. O.D. | .100 in.x .340 in. (2.54 mm x 8.64 mm) |
| Jacket Type Color | Gray |

| Conductor No. | Conductor |
|---------------|-----------|
| A | Yellow |
| B | Blue |
| C | Black |
| D | Orange |
| E | Red |
| F | Green |
| G | White |
| H | Violet |

