


Digital Integration Category 5 Cable

Rev.2. 5/02

Description:

- Multiple pair Category 5 cable
- UTP Category Cable
- 3 pair 24AWG unshielded
- FEP insulation
- Each pair twisted in varied lays
- Plenum PVC jacket

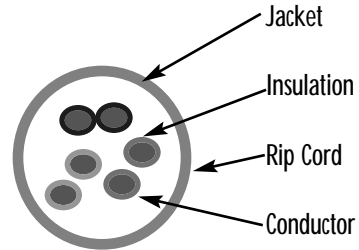


Applications:

- Analog and Digital voice systems
- Intercom systems
- Security (CCTV) systems
- 10 Base-T

Rating:

- UL listed NEC type CMP/MPP as defined in NEC Article 800
- Constructed in accordance with UL Standard 444
- Complies with UL 910 test modified ASTM Steiner Tunnel Test

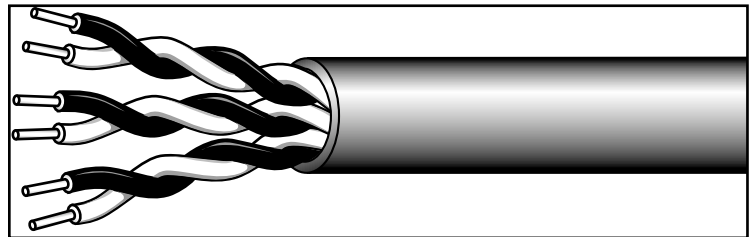

Electrical Characteristics:

- 100 ohms Impedance
- 14pf/ft (46pf/m)

Color Code:

Pair No.	1st Conductor	2nd Conductor
1	White/Blue	Blue
2	White/Orange	Orange
3	White/Green	Green

Installation Characteristics:

Bending Radius: (4x Cable O.D.)
 Pulling Tension: 25lbf (110N)

Mechanical Characteristics	
Number of Pairs	3
Awg. Size	24
Conductor Type	Solid Bare Copper
Insulation	FEP
Nom. Jacket Thickness	.020 in (.51mm)
Nom. O.D.	.168 in. (4.26mm)
Jacket Type Color	Gray

