


Riser Breakout Fiber Optic Cable

Rev. 2. 5/02

Construction:**Fiber:**

- A- Type: 50/125 Micron Multimode Coating: 250 Micron
- B- Type: 62.5/125 Micron Multimode Coating: 250 Micron
- W- Type: 8/125 Micron SingleMode Coating: 250 Micron

Buffer:

- 10- Tight Buffer Riser Thermoplastic
900 micron +/- 50 microns

Sub- Assembly:

- 10- 900 micron fiber + 2.0mm Sub-Unit Jackets

Strength Members:

- Aramid Yarn

Jacket:

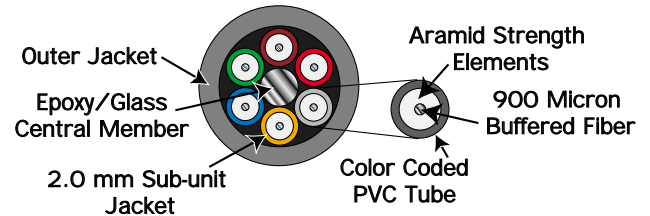
- Material: Thermoplastic PVC
Nominal Diameter: .454 inch (11.53mm)

Listing:

- UL Type OFNR

Rating:

- Crush Resistance (EIA-455-41):
2000N/cm
- Impact Resistance (EIA-455-25)
2000 impacts w/1.6N-cm)
- Maximum Load (Installation) 180lbs. (801newtons)
- Flexure (EIA-455-104)
2000 Cycles minimum
- Min. Bend Radius- Long Term - No Load: 10X Cable O.D.
- Min. Bend Radius- Short Term- Load: 15X Cable O.D.
- Operating Temperature:
-20° C to + 70° C
- Storage Temperature:
-40° C to + 80° C
- UL listed NEC Type OFNR
- Flame resistance UL1666 modified passed

**Optical Characteristics:****Glass Type:**

- A- 50/125 Micron- Multi-Mode
- B- 62.5/125 Micron- Multi-Mode
- W- 8/125 Micron- SingleMode

OPTICAL CHARACTERISTICS

Glass Type	Code (X)	Operating Wavelength (Nanometers)	Minimum Bandwidth (MHz-km)	Max. Attenuation (db/km)
50/125 MM	A	850 nm/1300 nm	500/500	3.50/1.25
62.5/125 MM	B	850 nm/1300 nm	200/500	3.50/1.25
8/125 SM	W	1310 nm/1550 nm	—	0.80/0.50

Applications:

- Riser Wiring
- Office wiring
- Computer room wiring

Minimum Bend Radius:

- Short Term: 6.8 inch (17.3cm)
- Long Term: 4.5 inch (11.5 cm)

Maximum load (installation):

- 600 lbs (2700 newtons)

