


Digital Integration Category 3 Cable

Rev.2. 5/02

Description:

- Multiple pair Category 3 cable
- UTP Category Cable
- 3 pair 24AWG unshielded
- Thermoplastic insulation
- Each pair twisted in varied lays
- Plenum Thermoplastic jacket

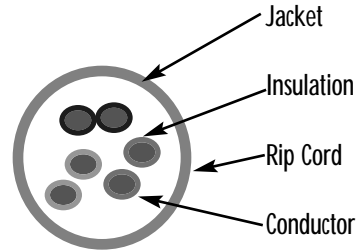


Applications:

- Analog and Digital voice systems
- Intercom systems
- Security (CCTV) systems
- 10 Base-T

Rating:

- UL listed NEC type CMP as defined in NEC Article 800
- Constructed in accordance with UL Standard 444
- Complies with UL 910 test modified ASTM Steiner Tunnel Test

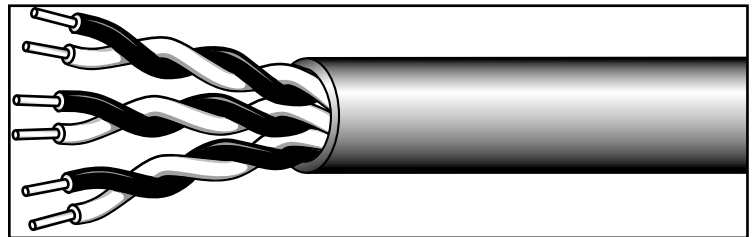

Electrical Characteristics:

- 100 ohms Impedance
- 18pf/ft (59pf/m)

Color Code:

Pair No.	1st Conductor	2nd Conductor
1	White/Blue	Blue
2	White/Orange	Orange
3	White/Green	Green

Installation Characteristics:

Bending Radius: (4x Cable O.D.)
 Pulling Tension: 25lbf (110N)

Mechanical Characteristics	
Number of Pairs	3
Awg. Size	24
Conductor Type	Solid Bare Copper
Insulation	Thermoplastic
Nom. Jacket Thickness	.020 in (.51mm)
Nom. O.D.	.141 in. (3.58mm)
Jacket Type Color	Gray

