


Aquaseal Water Resistant Cables®

No equal. If your installation calls for cables to run from one building to another, in conduit or directly buried in a wet location, have complete confidence in **Aquaseal Water Resistant Cables®**. With our water blocking tape, sunlight and moisture resistant jacket, you're assured signal integrity. Don't chance the install and settle for second best. When it comes to Aquaseal, there is no equal.

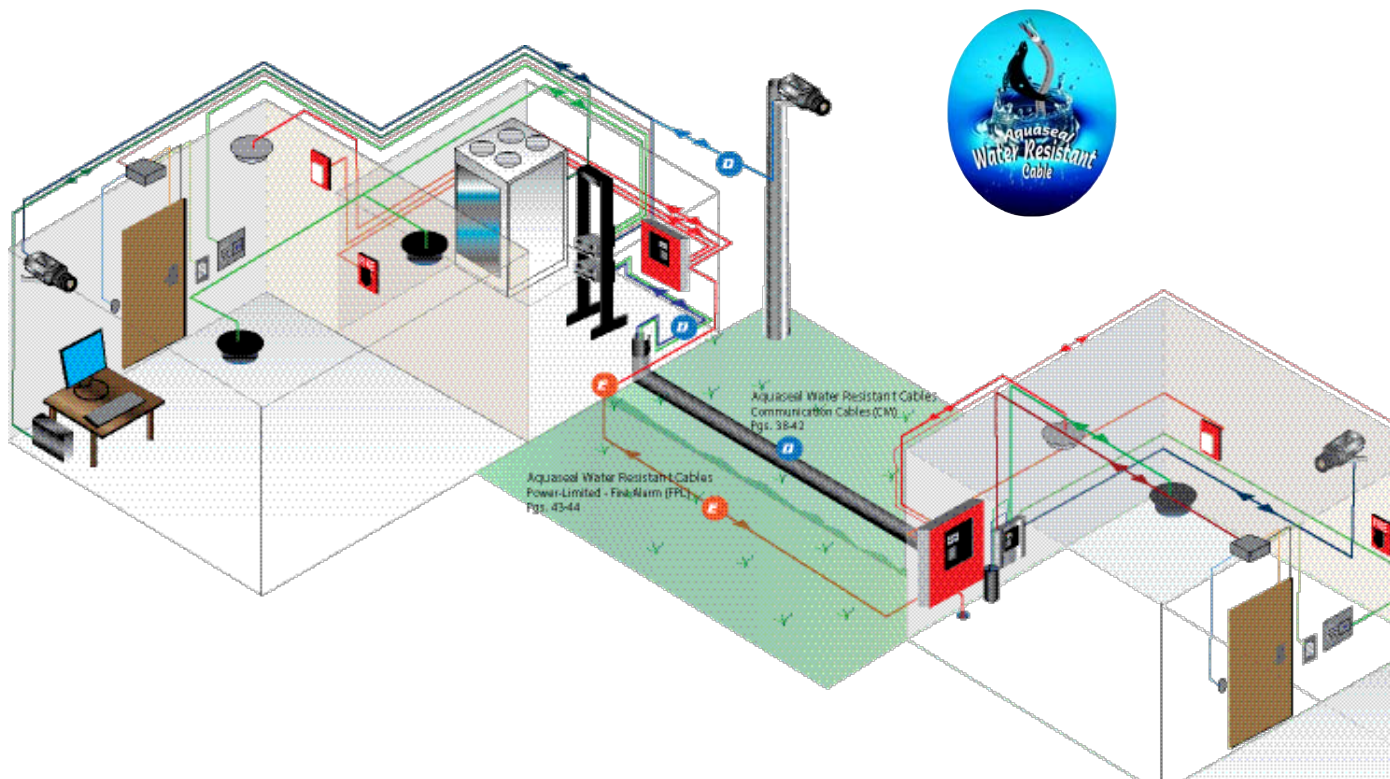


WEST PENN WIRE

800-245-4964

www.westpenn-wpw.com

PRODUCT INDEX:

| | |
|-----------------------------------|---|
| CCTV AQUASEAL CABLES | 1 |
| CATV/MATV AQUASEAL CABLES | 1 |
| SDI- HD-SDI AQUASEAL CABLES | 1 |

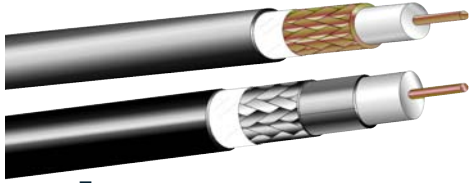

Aquaseal® Water Blocking Cable Coaxial Cables / Pro-Video- CATV - CCTV

Applications:

Indoor/Outdoor:

- CCTV Security
- SDI - Pro-Video
- MATV/CATV

Features:

- NEC Type CM
- Waterblocking Tape

Underground- In-Conduit

Mechanical Specifications

Standard pool size 1000ft.

| Catalog No. | Conductor Type & Nom. D.C.R | Nominal O.D | Insulation Type, O.D. | Shielding % Coverage | Jacket Type | Jacket Colors | NEC Type | Jacket Color |
|-------------|--------------------------------|--|--|--|--|---------------|----------|--------------|
| | | Inches | Inches | | | | | |
| AQC819 | 20 AWG Solid BC 10 Ω/M' | .242 | Gas Injected PE .142 | Waterblocking tape + Bifoil 100% TC Braid 95% | Sunlight Resistant PVC | Black | CM | Black |
| | | | | | | | | |
| AQC815 | 20 AWG Solid BC 10 Ω/M' | .242 | Gas Injected PE .142 + Tape Barrier | Waterblocking tape + Bifoil Bare Copper Braid 95% | Sunlight Resistant PVC | Black | CM | Black |
| | | | | | | | | |
| AQC841 | 18 AWG Solid BC 6.5 Ω/M' | .275 | Gas Injected PE .180 | Waterblocking tape + Bifoil 100% Al. Foil Al. Braid 65% | Sunlight Resistant PVC | Black | CM | Black |
| | | | | | | | | |
| AQC806 | 18 AWG Solid BC 6.5 Ω/M' | .280 | Gas Injected PE .180 + Tape Barrier | Waterblocking tape Bare Copper Braid 95% | Sunlight Resistant PVC | Black | CM | Black |
| | | | | | | | | |
| AQC2806 | 18 AWG Solid BC 6.5 Ω/M' | .280 x .580 | Gas Injected PE .180 + Tape Barrier | Waterblocking tape Bare Copper Braid 95% | Sunlight Resistant PVC Black- Lickity Split | Black | CM | Black |
| | | Connector Type 75Ω 3 Pc. Crimp BNC 75Ω Compression BNC | | | | | | |



Cable Construction:
1 Coax unit plus 1 pair 16 AWG Unshld.

AQC2806- Lickity Split Design



Electrical Specifications:

See Coaxial Cable Section for Electrical Specifications