


Aquaseal Water Resistant Cables®

No equal. If your installation calls for cables to run from one building to another, in conduit or directly buried in a wet location, have complete confidence in **Aquaseal Water Resistant Cables®**. With our water blocking tape, sunlight and moisture resistant jacket, you're assured signal integrity. Don't chance the install and settle for second best. When it comes to Aquaseal, there is no equal.

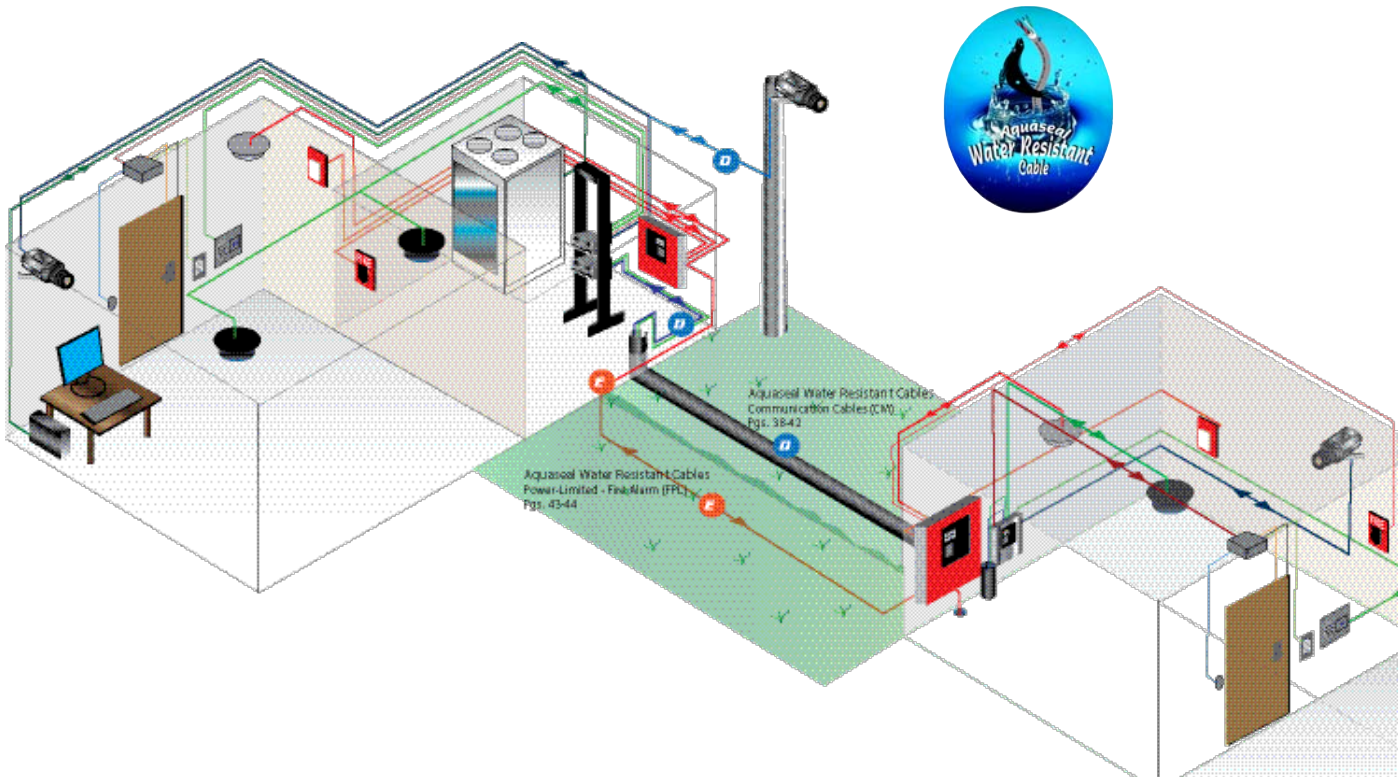


PRODUCT INDEX:

UNSHIELDED/SHIELDED INTERCOM CABLES1

AQUASEAL INTERCOM

Aquaseal® Water Blocking Cable Combination / Shielded and Unshielded



Description:

- ASTM Bare Copper • PVC insulation • Unshielded/Shielded pair 100% coverage of aluminum polyester foil with drain wire • Short overall twist Construction • Waterblocked construction • Overall Sunlight/ Moisture Resistant PVC jacket

Rating:

- NEC Type CM or CL3
- (UL) Listed
- Meets 300V requirements as specified in the NEC
- Flame Rating: UL1685

Applications:

- Indoor/Outdoor Use:
- Intercom Systems
 - Security Systems
 - Sound and Audio
 - Background Music
 - Power-limited Control Circuits

Underground- In-Conduit

Standard pool size 1000ft.

Catalog No.	No. of Cond.	Conductor Type & Nom. D.C.R	Insulation Type & Thickness	Shielding % Coverage	Jacket Type & Thickness	Nom. O.D.	NEC Type	Nom. Capacitance	Jacket Color
			Inches	Drain Wire					
AQC351	3 (2 Shld) (1 Unshld)	22 AWG Solid 17.5 Ω/Mft	PVC .008	Al. Foil- 100% 22 Solid	PVC .025	.215	CM CL3	54 pf/ft* 97 pf/ft**	Gray
AQC352	3 (2 Shld) (1 Unshld)	22 AWG (7x30) 17 Ω/Mft	PVC .007	Al. Foil- 100% 24 Strd.	PVC .025	.230	CM CL3	55 pf/ft* 99 pf/ft**	Gray
AQC355	4 (2 Shld) (2 Unshld)	22 AWG. Solid 17.5 Ω/Mft	PVC .008	Al. Foil- 100% 22 Solid	PVC .025	.220	CM CL3	54 pf/ft* 97 pf/ft**	Gray
AQC357	4 (2 Shld) (2 Unshld)	22 AWG (7x30) 17 Ω/Mft	PVC .007	Al. Foil- 100% 24 Strd.	PVC .025	.235	CM CL3	55 pf/ft* 99 pf/ft**	Gray
AQC369	6 (2 Shld) (4 Unshld)	22 AWG. Solid 17.5 Ω/Mft	PVC .008	Al. Foil- 100% 24 Solid	PVC .025	.240	CM CL3	54 pf/ft* 97 pf/ft**	Gray
AQC373	6 (1 Pr. Shld) (2 Pr. Unsh)	22 AWG Solid 17.5 Ω/Mft	PVC .008	Al. Foil- 100% 24 Strd.	PVC .025	.260	CM CL3	54 pf/ft* 97 pf/ft**	Gray
AQC359	4 (2 Shld) (2 Unshld)	20 AWG (7x28) 10.5 Ω/Mft	PVC .008	Al. Foil- 100% 24 Strd.	PVC .025	.266	CM CL3	60 pf/ft* 108 pf/ft**	Gray
AQC358	3 (2 Shld) (1 Unshld)	20 AWG (7x28) 10.5 Ω/Mft	PVC .008	Al. Foil- 100% 24 Strd.	PVC .025	.260	CM CL3	60 pf/ft* 108 pf/ft**	Gray

* Capacitance between conductors.

** Capacitance between one conductor and the other connected to the shield

Special Notes:

- Aquaseal Water Resistant Cables is a Registered Trademark of West Penn Wire
- Select Items are Packaged in our Advantage Box
- Orange ripcord under jacket

Color Code			
Catalog No.	AQC351, AQC352, AQC358, AQC355, AQC357, AQC359	AQC369	AQC373
Primary Color Code	Shielded: Black, Red Unshielded: White, Green	Black, Red, White, Green, Brown, Blue	Shielded: Black, Red Unshielded: Black, Green & Black, White
JACKET: Gray			